



**WALINGA**<sup>®</sup>  
6614D/7614D AGRI-VAC<sup>INC.</sup>







6614D & 7614D Ultra-Vac



**7614D DUAL BLOWER UNIT IN TRANSPORT MODE**



**AVAILABLE OPTIONS**


- 5th Wheel type hookup
- Dual Blower System
- Customer specified engine
- Full Rhino Lined Receiver Tank

**STANDARD ACCESSORIES**

- Hydraulically raised and rotated truck loading kit with cyclone
- Three 12' (3.65 m) stainless steel delivery lines
- One suction nozzle (Two on 7614D)
- One 12' (3.65 m) rubber cleanup hose
- One suction nozzle with cleanup attachment
- Hose carrier
- Tube carrier
- 6" (150 mm) cleanup hose package
- Self contained hydraulics
- Dual inlets
- Electric Brakes

**SPECIFICATIONS FOR: Walinga Pneumatic Grain Moving Unit Models 6614D & 7614D**

	6614D	7614D
<b>Height</b>	108 inches (274 cm)	108 inches (274 cm)
<b>Width</b>	100 inches (254 cm)	100 inches (254 cm)
<b>Length</b>	176 inches (447 cm)	176 inches (447 cm)
<b>Weight</b>	7000 lbs (3176 kg)	7200 lbs (3265 kg)
<b>Discharge Height</b>	14 ft minimum (4.26 m)	14 ft minimum (4.26 m)
<b>Line size</b>	5" & 6" (125 mm & 150 mm)	6" & 7" (150 mm & 175 mm)
<b>Axles</b>	Two - 7000 lbs (3176 kg) ea	Two - 5200 lbs (2358 kg) ea
<b>Tires</b>	Four - Highway tread	Four - Highway tread
<b>Rims</b>	8 Bolt 16x9	6 Bolt 15x6
<b>Brakes</b>	Electric	Electric
<b>Frame</b>	2" x 6" (50 cm x 150 cm) tubular	2" x 6" (50 cm x 150 cm) tubular
<b>Blower</b>	#614 Walinga Super Chrome positive displacement blower	#614 Walinga Super Chrome positive displacement blower
<b>Airlock</b>	#1618 cast iron shell, precision machined housing, 10 vane rotor stainless steel tips, hydraulically driven, reversible rotation	#1618 cast iron shell, precision machined housing, 10 vane rotor stainless steel tips, hydraulically driven, reversible rotation
<b>Engine</b>	John Deere, Model 6068T with 170 hp (127 kW) or equivalent	John Deere, Model 6068T with 185 hp (138 kW) or equivalent
<b>Drive</b>	Twin Disc Clutch connected to belts	Twin Disc Clutch connected to belts
<b>Hydraulics</b>	Heavy duty gear type pump, filter, hoses, controls, etc.	Heavy duty gear type pump, filter, hoses, controls, etc.
<b>Receiver</b>	28" dia. (71 cm) 2 piece. Dual inlets	32" dia. (81 cm) 2 piece. Dual inlets
<b>Precleaner</b>	24" dia. (61 cm)	24" dia. (61 cm)
<b>Safeguards</b>	Pressure and vacuum overload protection valves. Appropriate operation and warning decals. Appropriate belt guards.	Pressure and vacuum overload protection valves. Appropriate operation and warning decals. Appropriate belt guards.

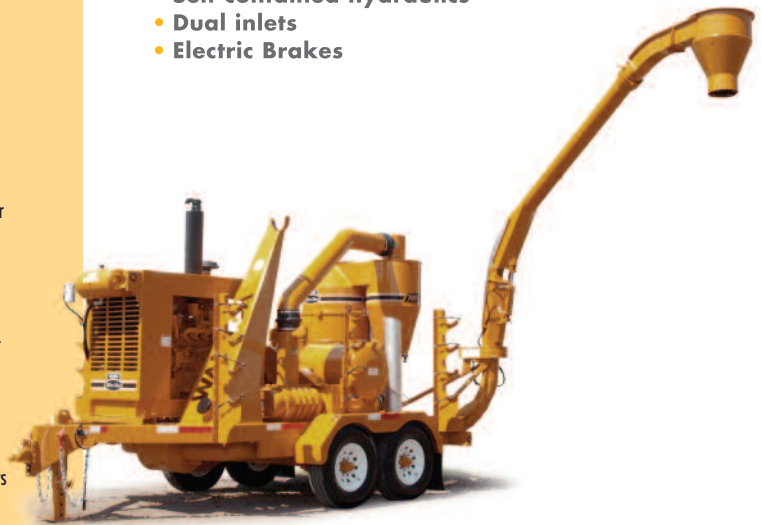

**6614D & 7614D**

CAPACITY*	Bu/hr		Tonnes/hr	
	6614D	7614D	6614D	7614D
Corn & Barley	3600	5000	92	127
Wheat	3200	4500	84	119
Beans	2800	4000	75	107

Due to continuous product development, specifications are subject to change without notice. Some items shown may be optional.

\* Capacities based on using 12' (3.65 m) suction line and truck loading kit. Capacity will vary with condition of product.



Agri-Vac Head Office:  
938 Glengarry Cres.  
Fergus, ON.  
Canada N1M 2W7  
Tel: (519) 787-8227  
Fax: (519) 787-8210

Michigan:  
1190 Electric Ave.  
Wayland MI.  
USA 49348  
Tel: (800) 466-1197  
Fax: (616) 877-3474

Manitoba:  
70 3rd Ave. N.E. Box 1790  
Carman, Manitoba  
Canada R0G 0J0  
Tel: (204) 745-2951  
Fax: (204) 745-6309

Saskatchewan:  
P.O. Box 849  
220 Frontage Rd.  
Davidson, Saskatchewan  
Canada S0G 1A0  
Tel: (306) 567-3031  
Fax: (306) 567-3039

[www.walinga.com](http://www.walinga.com)